



SHORING SYSTEM SRR

with roller strut

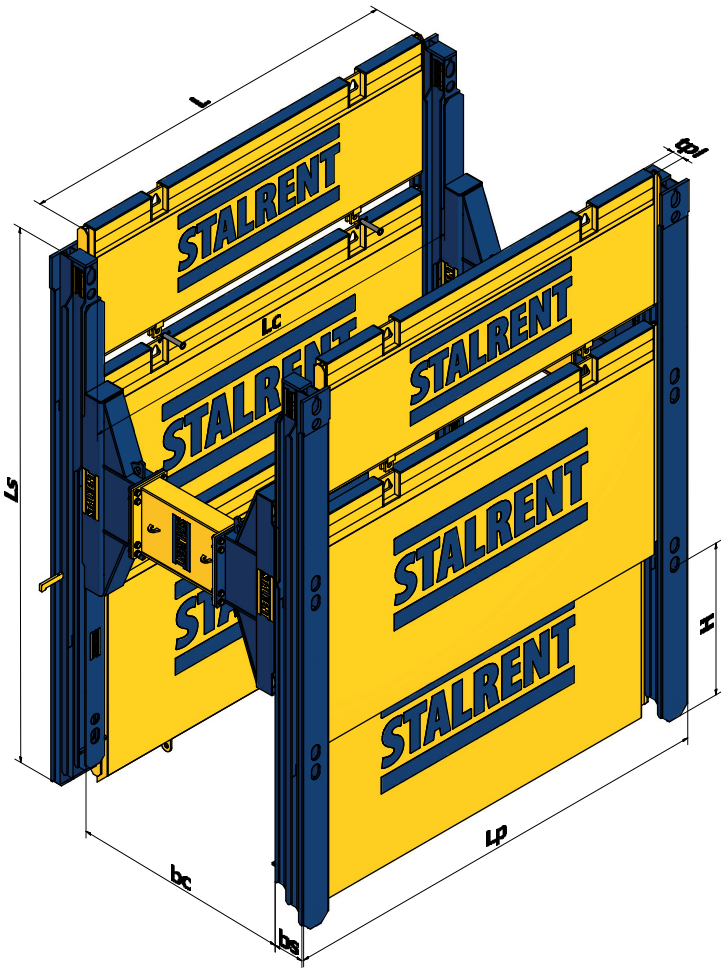

Name	Length of the column L_s (m)	Height of the column b_s (mm)	Calculated bending strength (kNm)	Characteristic bending strength (kNm)	Weight of the column (kg)
SRR 3500	3,50	230	395,00	592,50	510
SRR 4500	4,50	385	832,30	1 248,45	950
SRR 5500	5,50	385	832,30	1 248,45	1 180
SRR 6500	6,50	385	832,30	1 248,45	1 415
SRR 7500	7,50	385	832,30	1 248,45	1 645



Plates

Name	Plate length L (m)	Plate height H (m)	Plate thickness (mm)	Design strength (kN/m ²)	Strength characteristic R_k (kN/m ²)	Plate weight (kg)
PP 2000x2400	2,00	2,40	100	157,50	173,20	574
PP N 2000x1400	2,00	1,40	100	157,50	173,20	380
PP 2500x2400	2,50	2,40	100	105,00	115,50	687
PP N 2500x1400	2,50	1,40	100	105,00	115,50	455
PP 3000x2400	3,00	2,40	100	77,00	84,70	800
PP N 3000x1400	3,00	1,40	100	77,00	84,70	530
PP 3500x2400	3,50	2,40	100	60,50	66,50	915
PP N 3500x1400	3,50	1,40	100	60,50	66,50	600
PP 4000x2400	4,00	2,40	100	44,50	49,00	1 020
PP N 4000x1400	4,00	1,40	100	44,50	49,00	675
PP 4000x2400	4,00	2,40	130	92,00	138,00	1 510
PP N 4000x1400	4,00	1,40	130	92,00	138,00	955
PP 4500x2400	4,50	2,40	130	78,60	117,90	1 685
PP N 4500x1400	4,50	1,40	130	78,60	117,90	1 080
PP 5000x2400	5,00	2,40	130	66,00	99,00	1 860
PP N 5000x1400	5,00	1,40	130	66,00	99,00	1 190
PP 6000x2400	6,00	2,40	130	45,00	67,50	2 215
PP N 6000x1400	6,00	1,40	130	45,00	67,50	1 410