




COPYRIGHT © BY STALRENT

CITY BOX MB 60

- Light type formwork equipped with adjustable RS screw struts
- Excavator required: 12-18 t
- Maximum depth: 3.80 m
- Excavation width: 0,98–4,26 m
- Working height: 1.50 m

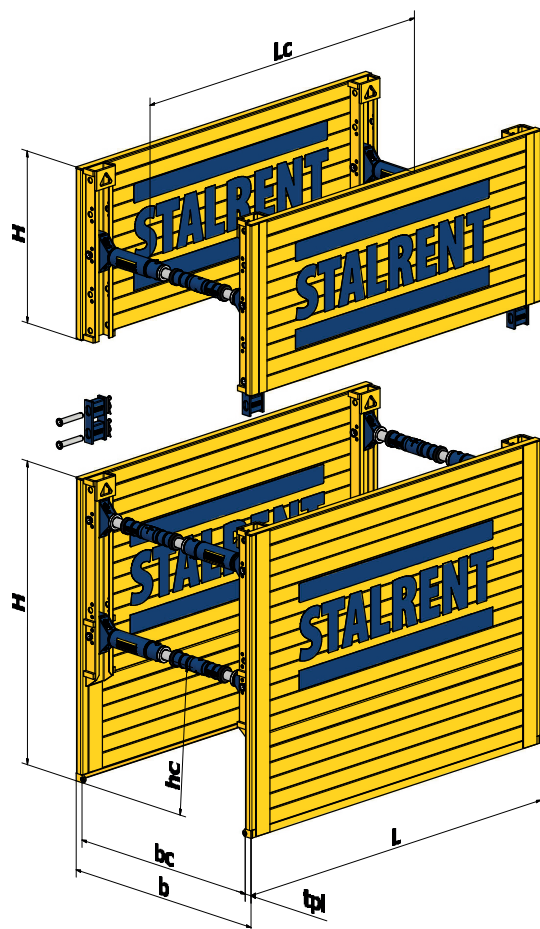

Accessories	Total weight (kg)
RP500	28
RP1000	39
RP1500	55
RP2000	69
Strut type RS 98x700	32
Strut type RSK 98x550	30
KS End	13
Pivot pin 20x147	0,5
Cotter pin fi 4 mm	0,1
Pivot pin 40x230	2,5
Cotter pin fi 6 mm	0,1
Complete strut RSK+2xKS+2x20x147+2x cotter pin fi4	65
Complete strut RS+2xKS+2x20x147+2x cotter pin fi4	70
LN connector	7
Press beam BDB 2000	75
Press beam BDB 2500	92
Press beam BDB 3000	110
Press beam BDB 3500	126

Name	Length of plate L (m)	Height of the plate H (m)	Thickness of the plate (mm)	Working length L _c (m)	Working height h _c (m)	Design strength (kN/m ²)	Characteristic strength R _k (kN/m ²)	Box weight (kg)
MB 60 2000x2400	2,00	2,40	60	1,60	1,27	40,00	60,00	1 390
MB 60 N 2000x1400	2,00	1,40	60	1,60		40,00	60,00	790
MB 60 2500x2400	2,50	2,40	60	2,10	1,27	32,00	48,00	1 560
MB 60 N 2500x1400	2,50	1,40	60	2,10		32,00	48,00	890
MB 60 3000x2400	3,00	2,40	60	2,60	1,27	27,00	40,50	1 740
MB 60 N 3000x1400	3,00	1,40	60	2,60		27,00	40,50	990
MB 60 3500x2400	3,50	2,40	60	3,10	1,27	22,50	33,75	1 900
MB 60 N 3500x1400	3,50	1,40	60	3,10		22,50	33,75	1 090

*Other dimensions on request